

PS/2 KVM Server Switch with OSD and RS232 Control Options

KEEMUX®

Control multiple PCs with one keyboard, monitor and mouse

- Control all network computers from one office.
- Auto scan all computers to catch system failures early.
- Improve manageability of your computer room – eliminate extra cables, monitors, keyboards and mice.
- Compatible with IntelliMouse®.
- Broadcast keystrokes to all computers for simultaneous shut-downs.
- Cascade smaller KVM switches together as your network grows-up to 128 ports.
- Available with OSD and/or RS232 Control options.
 - OSD not available on 2-port switch.



KEEMUX-P8-R (Front & Back)

The KEEMUX® PS/2 KVM switch allows one keyboard, monitor and mouse to control multiple PCs (up to 128 computers). Dedicated internal microprocessors emulate keyboard and mouse presence to each attached PC 100% of the time so all computers boot error free.

Specifications

Hosts

- Female 15-pin HD and female 6-pin miniDIN connectors.
- Compatible with all PS/2-style PCs and laptops, HP9000, Silicon Graphics and IBM RS6000 workstations.
- Compatible with SUN Fire V20z.
- Multiplatform support: Windows 2000/XP/Vista/7/8/10, Windows Server 2000/2003/2008/2012, Solaris, Linux, FreeBSD, and MAC OS 9/10.

Monitor

- Female 15 pin HD connectors.
- Supports 1900x1200 resolution with no degradation.
- Bandwidth is 150 MHz.

Mouse

- Female 6-pin miniDIN connectors.
- Compatible with all standard 2-button PS/2 mice as well as the following:
 - Alps Glidepoint Touchpad – extended functions (i.e. tapping, etc.) are not supported.
 - Cirque Glidepoint Touchpad.
 - IBM Scroll Point mouse – extended stick functions are not supported.
 - Kensington Orbit Trackball.
 - Logitech (and other) 3-button mice.
 - Logitech 2-button Wheel Mouse.
 - Microsoft Ballpoint mouse.
 - Microsoft IntelliMouse.

Keyboard

- Female 6-pin miniDIN connectors.
- Keyboard and mouse presence are emulated 100% of the time so all computers boot error-free.
- Keyboard and mouse are hot-pluggable.
- PC switch will hard or soft boot all PCs 100% of the time.
- SCROLL-, CAPS- & NUM- LOCK lights update upon switching.

Power

- 110 or 220 VAC at 50 or 60 Hz via AC adapter.
- Two-port switches draw power from attached computers.

MTBF

- KEEMUX-P8-R: 60,750 hrs

Environmental

- Operating temperature: 32 to 100°F (0 to 38°C).
- Storage temperature: -20 to 140°F (-30 to 60°C).
- Operating and Storage Relative Humidity: 17 to 90% non-condensing RH.


Regulatory Approvals

- RoHS
- TAA compliant

Warranty

- 2 years

Configuration and Cable Illustration

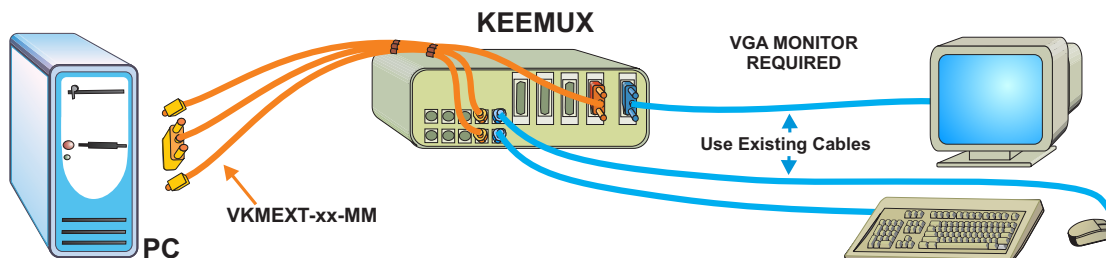

PS/2 KVM Server Switch with OSD and RS232 Control Options

KEEMUX®

Control multiple PCs with one keyboard, monitor and mouse

Control Methods

Front Panel Interface

- Touch a button and be connected to a CPU or change modes of operation.
- LEDs indicate currently selected port and mode of operation.
- Hold in any button for more than two seconds to go into **Scan Mode**, **Broadcast Mode** or **Command Mode**.
 - **Normal Operating Mode**, the user can directly operate the selected computer with transparent presence of the NTI switch.
 - **Scan Mode** feature causes the switch to automatically and sequentially display the video from each powered on computer for 2-255 seconds.
 - **Broadcast Mode** feature allows the user's keystrokes to be sent to all powered on computers.
 - **Command Mode** allows the user to give instructions to the switch through their keyboard. Keystrokes are not passed to the computer.

Keyboard

- Type <CONTROL> + <~> to go into **Command Mode**. (" ` " is the accent mark located on the same key as the tilde " ~ ")
- Press ESCAPE to leave **Command Mode** and return to **Normal Mode**
- **Scan Mode**, **Broadcast Mode** or **Command Modes** are available from the keyboard.

PS/2 KVM Switch, Desktop Models

| NTI Part # | # of CPU's | Size WxDxH (in) |
|------------|------------|-----------------|
| KEEMUX-P2 | 2 | 8x6.2x2.6 |
| KEEMUX-P4 | 4 | 10x7.5x3.3 |

PS/2 KVM Switch, Rackmount Models

| NTI Part # | # of CPU's | Rack Units | Size WxDxH (in) |
|-------------|------------|------------|-----------------|
| KEEMUX-P4-R | 4 | 1RU | 19x12x1.75 |
| KEEMUX-P8-R | 8 | 1RU | 19x12x1.75 |

PS/2 KVM Switch with RS232 Control, Desktop Models

| NTI Part # | # of CPU's | Size WxDxH (in) |
|--------------|------------|-----------------|
| KEEMUX-P4-RS | 4 | 10x7.5x3.3 |

PS/2 KVM Switch with OSD, Desktop Models

| NTI Part # | # of CPU's | Size WxDxH (in) |
|-------------|------------|-----------------|
| KEEMUX-P8-O | 8 | 10x7.5x3.3 |