

Quad Head DVI-D, USB Keyboard, Mouse and Audio Extender Over Cat5e/6 Up to 245 ft.



LDX-4P

Quad Head DVI-D, Dual RS-232, Audio and USB Keyboard and Mouse Extender
Extend Quad DVI-D, Dual RS-232, USB and Audio up to 245 Feet Over Four Cat5e/6 Cables

OVERVIEW

Using HDBaseT technology, the LDX-4P DVI extender is capable of sending quad DVI-D signals up to 245 feet over four conventional and inexpensive CAT5e/6 cables. HDBaseT technology is superior to older DVI extenders that require a special Cat6 shielded cable to go a short distance. The LDX-4P also has USB keyboard and mouse, audio and RS-232 extension, giving users the ability to control displays or devices remotely.


FEATURES

- Extends dual DVI-D up to 245 feet from the source
- HDCP Support
- Supports up to 1920x1200 digital video resolution @ 60Hz
- Supports 4K/2K (3840x2160) video resolution @ 30Hz
- Automatic DDC Learning
- USB Keyboard and Mouse extension
- Uncompressed Video using HDBaseT
- RS-232 extension allows for remote control of displays
- External power adapter for transmitter and receiver unit
- Supports Stereo Sound
- Compatible with Windows, Mac and Linux Operating Systems


APPLICATIONS

- Digital Signage
- Security
- PC Networking
- Conference Center Systems
- Point of Sale
- Camera Surveillance
- Video Phone
- Control Room Systems
- Recording Studio
- PC KVM Extension

APPLICATION DIAGRAM

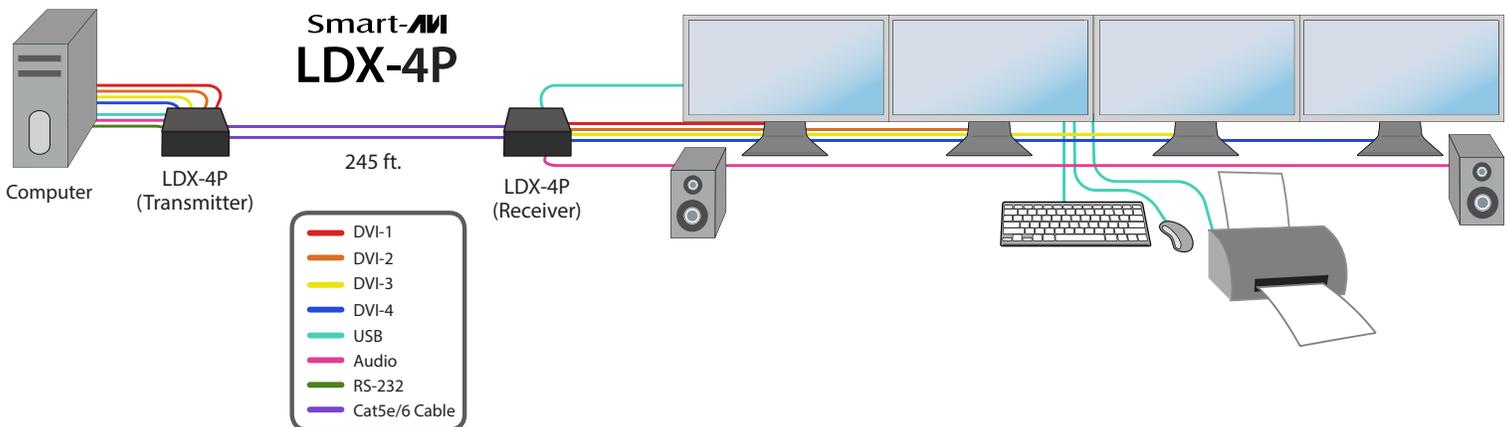

SPECIFICATIONS

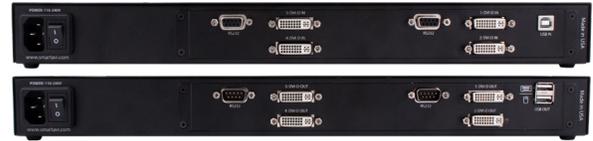

VIDEO	
Format	DVI-D
Maximum Pixel Clock	165 MHz
Input Interface (TX)	(4) DVI-D 29-pin female
Output Interface (RX)	(4) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @ 60Hz AND Up to 4K/2K (3840x2160) @ 30Hz
DDC	5 volts p-p(TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft
Output Cable Length	Up to 20 ft
RS-232	
Input Interface (TX)	(2) DB9 (Female)
Output Interface (RX)	(2) DB9 (Female)
Speed	@ 115 Kbps
IR	
Input Interface (TX)	(1) 3.5 mm (Female)
Output Interface (RX)	(1) 3.5 mm (Female)
Frequency Response	30KHz to 80KHz
USB	
Input Interface (TX)	(1) USB Type B (Female)
Output Interface (RX)	(2) USB Type A (Female)
Signal Type	OHCI/VHCI (USB 1.1)
OTHER	
Power	External 100-240 VAC/5VDC3A @20W
Dimensions	17 in W x 1.7 in H x 3.2 in D
Weight	2 lbs
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

Part No.	Description
LDX-4PS	Complete 1U Rackmount system to extend Quad DVI-D, USB Keyboard/Mouse, RS232 and Audio over CAT5e/6 cable, up to 245 ft. Includes: [LDX-4P-TX, LDX-4P-RX, and 2 x CCPWR06]
LDX-4P-TX	Quad DVI-D, USB 1.1, RS232, Audio over CAT5/5e/6 Transmitter. Includes: [LDX-4P-TX, PS5VD4A-WLLMNT]
LDX-4P-RX	Quad DVI-D, USB 1.1, RS232, Audio over CAT5/5e/6 Receiver. Includes: [LDX-4P-RX, PS5VD4A-WLLMNT]



Designed and Manufactured in the USA

www.smartavi.com

Tel: 800.AVI.2131 • 818.503.6200
2455 W Cheyenne Ave, Suite 112
North Las Vegas, NV 89032

Smart-AVI
SMART AUDIO VIDEO INNOVATION