

SM-UHX-2D

2-PORT DUAL HEAD DP/HDMI TO HDMI KVM SWITCH



**ALLOWS THE CONTROL OF TWO COMPUTERS WITH 4K DUAL HDMI VIDEO OUTPUT
VIA A SINGLE CONSOLE SET**

FEATURES

- Control two computers via one USB console
- Support the computer with resolution up to 4K UHD (3840 x 2160 @ 60 Hz) dual-head HDMI video output
- HDMI 2.0 & HDCP 2.2 compliant
- DisplayPort 1.2 compliant
- Flexible and easy switching
- Computers and devices can be unplugged and re-plugged without having to shut down the KVM switch
- Indicate the connected computers' statuses clearly
- Control the computer conveniently & easily
- USB transparency suitable for variety of peripherals
- Support the computer's audio line in/out
- Perform under no software installation

APPLICATIONS

- Server Collocation
- Digital Signage
- Education
- Airports
- Dealer Rooms
- Control Rooms
- Audio/Visual Presentations
- Shopping Centers
- Hotels/Resorts




Designed and Manufactured in the USA

OVERVIEW

The SM-UHX-2D KVM Switch allows the control of two computers with 4K dual HDMI video output via a single console set of USB keyboard/mouse/hub, microphone, speaker and display. The SM-UHX-2D KVM Switch has built-in USB 2.0 compliant and 3.5mm mini stereo ports allow sharing of the USB keyboard/mouse/hub, speaker, and microphone among the connected computers. The switching between the connected computers is executed by using the front panel or keyboard hotkey commands. Product set-up is quick and simple with no software to install, so you're ready to go right out of the box.

- HDMI IN
- DP IN
- HDMI OUT
- USB IN
- USB K/M OUT
- USB 2.0 OUT
- AUDIO IN
- AUDIO OUT
- MICROPHONE IN

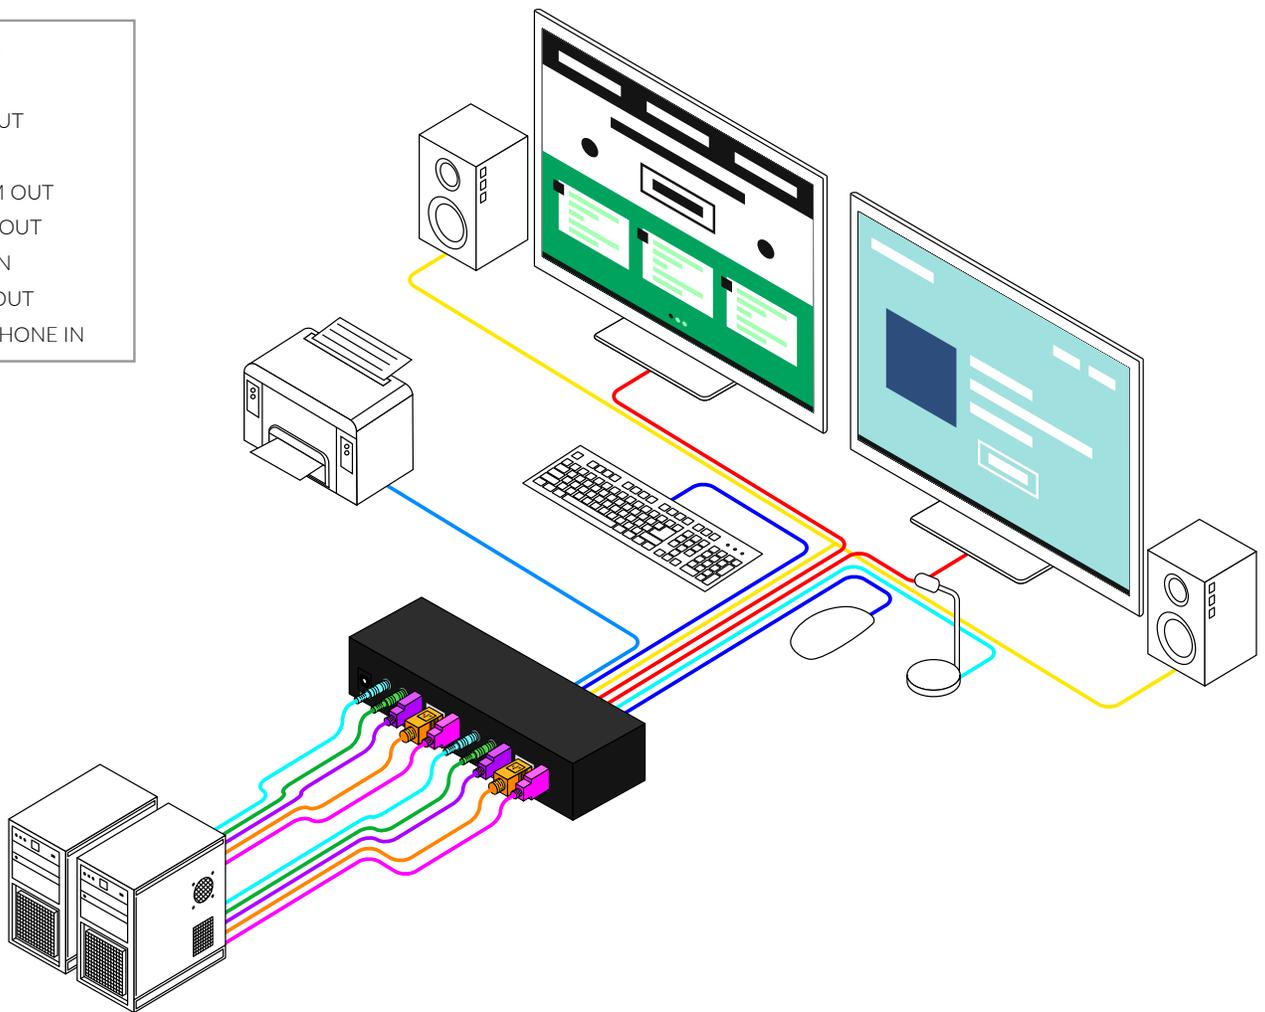

FRONT AND BACK



Front panel



Back panel

TECHNICAL SPECIFICATIONS

SYSTEM	
Console Port	(2) HDMI female for output (2) USB Type A female for HID devices (2) USB Type A female for USB 2.0 hub (2) 3.5-mm audio phone jack
PC Port	(2) HDMI female for input (2) DisplayPort female for input (2) USB Type B female (4) 3.5-mm audio phone jack Other: 2.1-mm barrel plug for power
Console x PC	1 x 2
PC Port switch interface	1 x push button
LED interface	Clock frequency beyond 165Mpix/second
Format	To show PC port selection status and connection status

OTHER	
Power Supply	Input: 100-240 VAC, 50/60Hz, 0.4A; Output: 5V, 2A
Dimension	6.57"W x 3.31"D x 1.26"H (16.7 x 8.4 x 3.2 cm)
Weight	0.200 kg
Storage Temperature	-20°C ~ 60°C
Operating Humidity	0% ~ 80% RH

PART NO.	DESCRIPTION
SM-UHX-2D-S	2-Port 4K HDMI Dual-head KVM Switch. Includes: [SM-UHX-2D, PS5VD2A]

www.smartavi.com

Tel: (800) AVI-2131 • (702) 800-0005
2455 W Cheyenne Ave, Suite 112
North Las Vegas, NV 89032

Smart-AVI
SMART AUDIO VIDEO INNOVATION